Heritage Flush Sash | www.deceuninck.co.uk



Heritage flush sash looks great in any surrounding; modern townhouse or country cottage, its subtle charm and elegance transforms the building like no other.

With its flush external contours, something considered more in keeping on period

properties, satisfying the requirements of your local conservation officer just got a whole lot easier, especially when you add the all important Georgian bar for that archetypal chocolate box house you've always dreamed of.



Deceuninck Limited

Stanier Road • Porte Marsh Industrial Estate • Calne • Wiltshire SN11 9PX T 01249 816 969 • F 01249 815 234

 $deceuninck. Itd@deceuninck.com \cdot www.deceuninck.co.uk$

January 2021

Document No: 82130 – 8104 Heritage Flush Sash

Weather Performance

Internally we've adopted our tried and tested high performance multifunctional weatherseal. With a continuous seal welded at the corners, air tightness is always maintained meaning no loss of comfort inside the home.

Externally a new dual seal combination maximises water tightness and conceals hardware.


An integral drainage slope encourages water to drain away quickly and easily.

Security

The Deceuninck flush sash had the homeowner in mind during its design, so unlike others there's no compromise when it comes to things like having a night vent locking position. The bespoke locking keep also means full hardware compatibility, giving the window unrivalled security for a product of this type... achieving PAS24 just got a whole lot easier.

Insulation

With its core designed around Heritage 2800, the insulating properties of flush sash are even more impressive. A double glazed window U value of just 1.2 or noise reduction value as high as 43 dB epitomises this market-leading product.

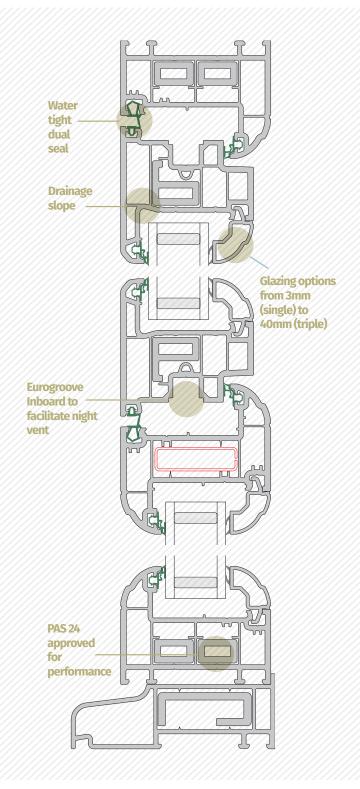




Heritage Flush Sash | www.deceuninck.co.uk

Weather test results

		Top Hung Casement	Side Hung Casement	French Casement
	Size Tested	1.2m x 1.2m	0.7m x 1.4m	1.41m x 1.31m
Air	Class	4	4	3
Permeability	Rating	600 Pa	600 Pa	600 Pa
Water	Class	E900	E900	6A
tightness	Rating	900 Pa	900 Pa	250 Pa
Wind	Class	(TCI) A5 (steel) AE	(TCI) A5 (steel) AE	(TCI) B5
Resistance	Rating	(TCI) 1600 Pa (steel) 2400 Pa	(TCI) 1600 Pa (steel) 2400 Pa	(TCI) 2000 Pa





4/20/4 Arg	gon Cavity	4/14/4/14/4 Argon Cavity		
U _g 1.219	U _g 1.070	U _g 0.683	U _g 0.591	
U _w 1.4	U _w 1.2	U _w 0.94	U _w 0.90	

WER's


4/20/4 Argon Cavity	4/14/4/14/4 Argon Cavity	
A+ 12	A++ 23	

Sound Insulation

$R_{\rm W}$	С	C_{TR}	IGU	Interlayer
35	-1	-5	4/20/4	-
39	-2	-6	6.8/18/4	PVB
43	-2	-5	8.8/16/10	Optiphon










Deceuninck Limited

Stanier Road • Porte Marsh Industrial Estate • Calne • Wiltshire SN11 9PX T 01249 816 969 • F 01249 815 234

Heritage Flush Sash | www.deceuninck.co.uk



30 COLOURWAYS IN STOCK

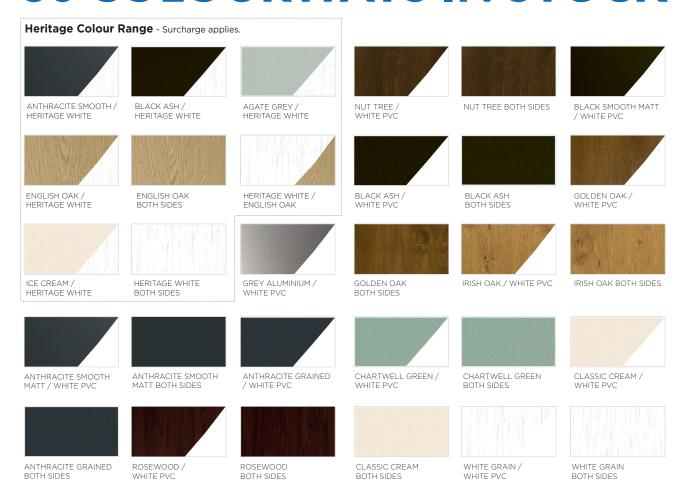

A unique range of woodgrain foil colours in 30 colourways in stock, complete with matching ancillaries, trims and accessories.

Beautiful authentic 'wood like' finish

WHITE PVC

- Extremely durable
- 10 year manufacturer's guarantee
- Each colour has its own matching ancillaries, trims and accessories
- Available from stock



WHITE PVC



BOTH SIDES



Deceuninck Limited

Stanier Road • Porte Marsh Industrial Estate • Calne • Wiltshire SN11 9PX T 01249 816 969 • F 01249 815 234

BOTH SIDES

deceuninck.ltd@deceuninck.com • www.deceuninck.co.uk

January 2021 Document No: 82130 - 8104 Heritage Flush Sash